
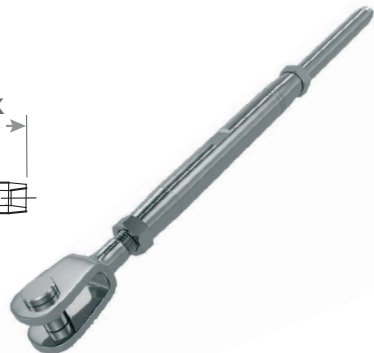


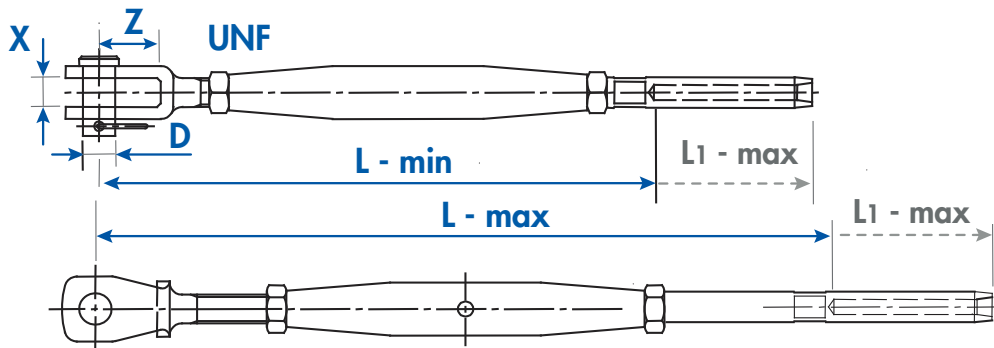

Ref N°	Wire Ø Câble Ø mm	Thread Filetage UNF	ø D mm	Z mm	X mm	L0min/max mm	L1min/max. mm	Min. break. load Charge rupture min. [kg]
1513030060	3.0	1/4"	6.3	13.5	7.0	182-247	220.5-285.5	1240
1513040060	4.0	1/4"	6.3	13.5	7.0	189-254	229-294	1470
1513040080	4.0	5/16"	7.9	17.0	8.2	209-281	253-325	1570
1513050080	5.0	5/16"	7.9	17.0	8.2	218-290	269.5-341.5	2360
1513050100	5.0	3/8"	9.5	20.0	10.0	190-267	242.5-319.5	2440